


CAC Technology® Data Sheet

RF Coaxial Cable Assembly P/N: L22S6-29M029M0-XXX

Description

L22S6-29M029M0-XXX

2.92mm straight male to 2.92mm straight male with $\Phi 2.80\text{mm}$ flexible cable, high performance microwave cable assembly.

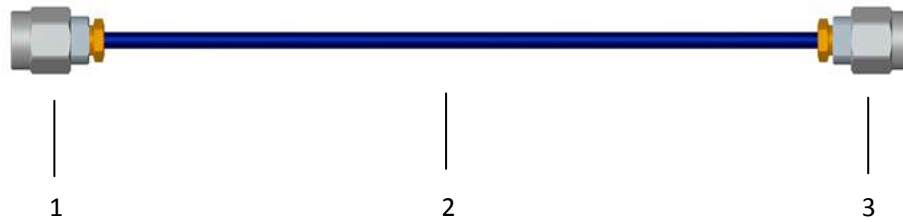

(Labels and shrinking tubes could be customized according to customer's request.)

The Parts

The Connector1:	①P/N: S29MH2200	2.92mm male	
The Cable:	②P/N: 22S6_FEP	flexible cable	LZSH
The Connector2:	③P/N: S29MH2200	2.92mm male	

Electrical Data

Impedance	50 ohm	VSWR	1.35Max	Dc~40GHz
Max. operating frequency	40 GHz	Shielding effectiveness	> 90 dB (@1 GHz)	
Max. operating voltage	1500V			

Mechanical Data

Weight	75g for 1m cable assembly, 24g increase for 1m cable increase
Min. bending radius	See also in DATA SHEET of P/N: 22S6_FEP

Environmental Data

Temperature range	-55 °C ~ +125 °C
2011/65/EU (RoHS)	compliant

Attenuation & CW Power

See also in DATA SHEET of P/N: 22S6_FEP and P/N: S29MH2200.

Version	Drawn/Date	Check/Date
02	Rudy 2014.12.18	Mark 2014.12.19



proprietary information:
the information with this data sheet is proprietary and shall not be used for disclosed without prior written permission from CAC Technology

Hefei CAC Electronic Technology Co.,Ltd.

Tel: 0086-551-63718423

Fax:0086-551-63718413

www.cactechnology.com

