


P / N:	A29F24F00	半山阁
Description:	2.92mm female to 2.4mm female adapter	



1:1

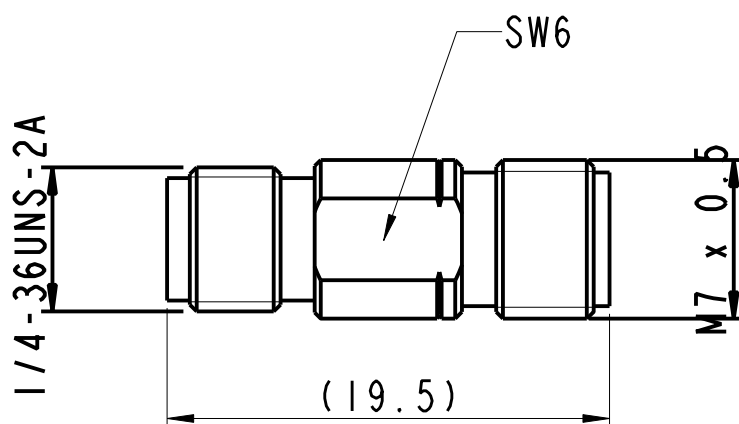

<i>Electrical Data</i>	<i>Materials</i>	<i>Enviromental Data</i>	<i>Mechanical Data</i>
Impedance :50 ohm	Housing: Stainless steel; passivating	Salt Spray Test:48h	Mating Cycles:500
Frequency:DC-40GHz	Contact female:BeCu; Gold Plated	Vibration:MIL-STD 202 214A	Coupling Proof Torque: 1.17N.m
VSWR:1.15Max 40GHz	Contact male:Brass; Gold Plated	Thermal shaoock:MIL-STD 202 107G	Coupling Nut Retention: 269N min
IL:0.06sq $\sqrt{f_GHz}$	Center Capture:PEI	Weight:9g	Center Contact Captivation: 22N min
Dielectric Withstanding Voltage:1000V	Nut:---	Temp:-55 - +135	Force to Engagement:0.23N.m
Insulation Resistance: 5000Mohm	Clasp:---	2011/65/EU (RoHS): compliant	Force to Disengagement:N/A

Date:	2013.11.29	www.cac-mall.com Tel: 0086-551-63718423 Email: sales@cactechnology.com
Drawn:	Rudy Sun	
Check:	Donglv Wang	
Appr:	Rugang Hu	