

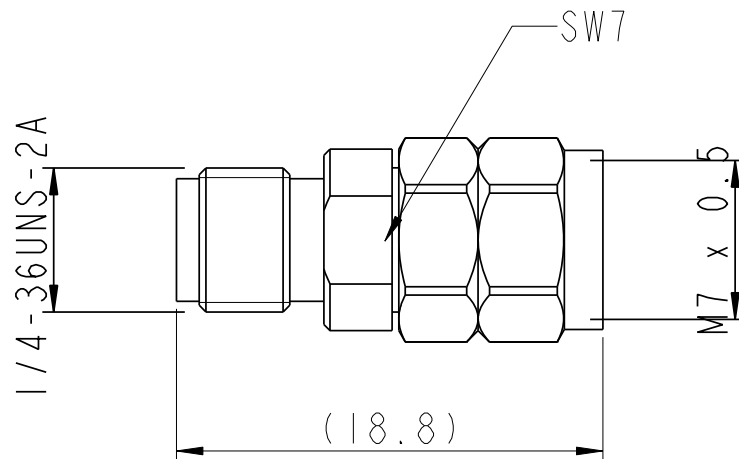
P / N :

A29F24M00

Description: 2.92mm female to 2.4mm male adapter



1:1

*Electrical Data**Materials**Enviromental Data**Mechanical Data*

Impedance :50 ohm

Housing: Stainless steel;
passivating

Salt Spray Test:48h

Mating Cycles:500

Frequency:DC-40GHz

Contact female:BeCu;
Gold PlatedVibration:MIL-STD
202 214ACoupling Proof Torque:
1.17N.m

VSWR:1.15Max 40GHz

-

Thermal shaoock:MIL-STD
202 107GCoupling Nut Retention:
269N min

IL:0.06sq+(f_GHz)

Center Capture: PEI

Weight:9g

Center Contact Captivat o
22N minDielectric Withstanding
Voltage:1000VNut:Stainless steel;
passivating

Temp:-55 - +135

Force to Engagement:0.23N

Insulation Resistance:
5000MohmClasp:QSn6.5-0.1
(Bronze)2011/65/EU (RoHS):
compliant

Force to Disengagement:NA

proprietary information: the information with this data sheet is
proprietary and shall not be used for disclosed without prior written
permission from CAC Technology .

Date:

2013.11.29

www.cac-mall.com

Drawn:

Rudy Sun

Tel: 0086-551-63718423

Check:

Donglv Wang

Email: sales@cactechnology.com

Appr:

Rugang Hu