

P/N:

A29F29F00

半山阁

Description:

2.92 female to 2.92 female adapter




1:1

2.92mm female

SW7

2.92mm female

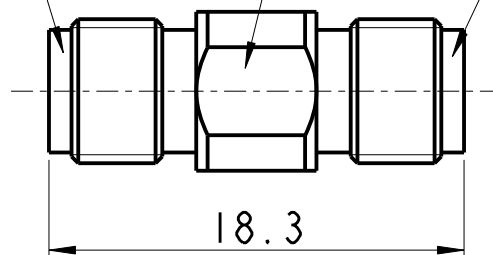

18.3

Electrical Data

Impedance : 50 ohm

Frequency: DC - 40GHz

VSWR: 1.15Max 40GHz

IL: 0.06sq(f_GHz)

*Materials*Housing: Stainless steel;
passivatedCenter Contact: BeCu;
Gold Plated

Center Capture: PEI

Nut: -

Enviromental Data

Temp: -55 - +135

Vibration: MIL-STD
202 214AThermal shaoock: MIL-STD
202 107G2011/65/EU (RoHS):
compliant

Date:

2014.8.13

Drawn:

Rudy Sun

Check:

Donglv Wang

Appr:

Rugang Hu

半山阁

Tel: 0086-551-63718423
www.cactechtechnology.com