

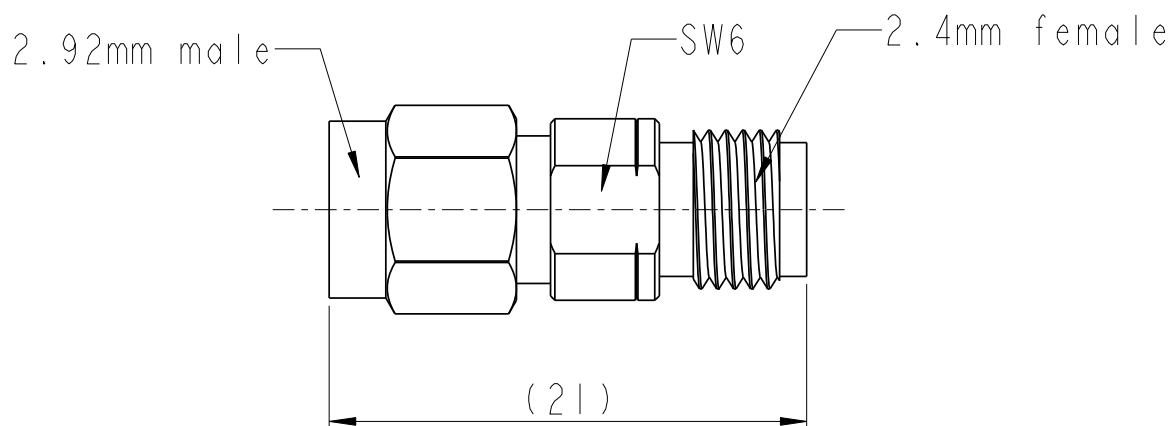
P/N:

A29M24F00

Description: 2.92mm male to 2.4mm female adapter



1:1

*Electrical Data**Materials**Enviromental Data**Mechanical Data*

Impedance :50 ohm

Housing: Stainless Steel;
Passivating

Salt Spray Test:48h

Mating Cycles:500

Frequency:DC-40GHz

Contact female:BeCu;
Gold PlatedVibration:MIL-STD
202 214ACoupling Proof Torque:
1.7N.m

VSWR:1.15Max 40GHz

Contact male:BeCu;
Gold PlatedThermal shaoock:MIL-STD
202 107GCoupling Nut Retention:
269N min

IL:0.06sq+(f_GHz)

Center Capture: PEI

Weight:14g

Center Contact Captivation:
22N minDielectric Withstanding
Voltage:1000VNut: Stainless Steel;
Passivating

Temp:-55 - +135

Force to Engagement:
0.23N.mInsulation Resistance:
5000MohmClasp:QSn6.5-0.1
(Bronze)2011/65/EU (RoHS):
compliantForce to Disengagement:
N/A

proprietary information: the information with this data sheet is proprietary and shall not be used for disclosed without prior written permission from CAC Technology .

Date:

2013.8.13

www.cac-mall.com

Drawn:

Rudy Sun

Check:

Donglv Wang

Appr:

Rugang Hu

Tel: 0086-551-63718423

Fax: 0086-551-63713075

Email: sales@cactechnology.com