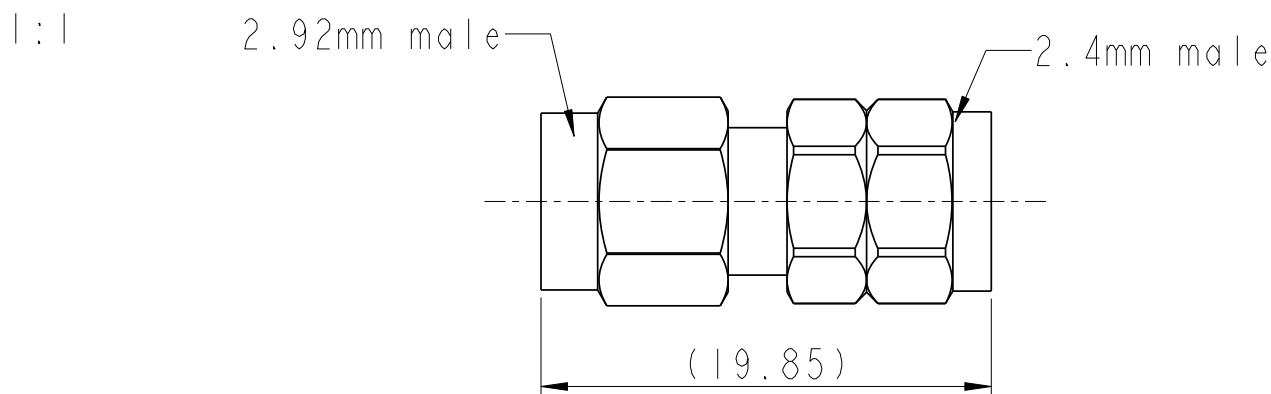


P / N :

A29M24M00

Description:

2.92mm male to 2.4mm male adapter

*Electrical Data**Materials**Enviromental Data*

Impedance :50 ohm

Housing: Stainless steel;
passivated

Temp:-55 - +135

Frequency:DC-40GHz

Center Contact:BeCu;
Gold PlatedVibration:MIL-STD
202 214A

VSWR:1.15Max 40GHz

Center Capture: PEI

Thermal shaoock:MIL-STD
202 107G

IL:0.06sq+(f_GHz)

Nut:Stainless steel;
passivated2011/65/EU (RoHS):
compliant

proprietary information: the information with this data sheet is
proprietary and shall not be used for disclosed without prior written
permission from CAC Technology .

Date:

2017.8.13

www.cac-mall.com

Drawn:

Rudy Sun

Check:

Jack Wu

Appr:

Rugang Hu

Tel: 0086-551-63718423

Fax: 0086-551-63713075

Email: sales@cacotechnology.com

Website: www.cacotechnology.com