

P / N :

ASMFSMF00

Description:

SMA female to female adapter


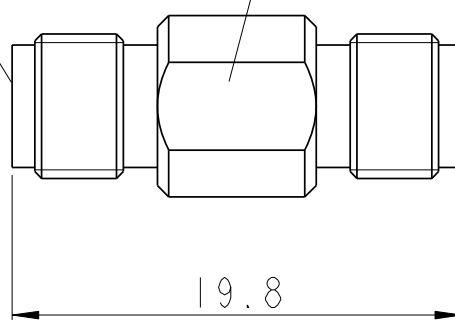


1:1

SMA female

SW7

SMA female

*Electrical Data**Materials**Enviromental Data*

Impedance :50 ohm

Housing: Stainless steel;
passivated

Temp:-55 - +125

Frequency:DC-18GHz

Center Contact:CuBe;
Gold PlatedVibration:MIL-STD
202 214A

VSWR:1.15Max 18GHz

Center Capture: PTFE

Thermal shaoock:MIL-STD
202 107G

IL:0.06sq+(f_GHz)

Nut:----

2011/65/EU (RoHS):
compliant

proprietary information: the information with this data sheet is proprietary and shall not be used for disclosed without prior written permission from CAC Technology .

Date:

2014.12.16

www.cac-mall.com

Drawn:

Rudy Sun

Check:

Donglv Wang

Appr:

Rugang Hu

Tel: 0086-551-63718423

Fax: 0086-551-63713075

Email: sales@cactechnology.com

Website: www.cactechnology.com