

P/N:

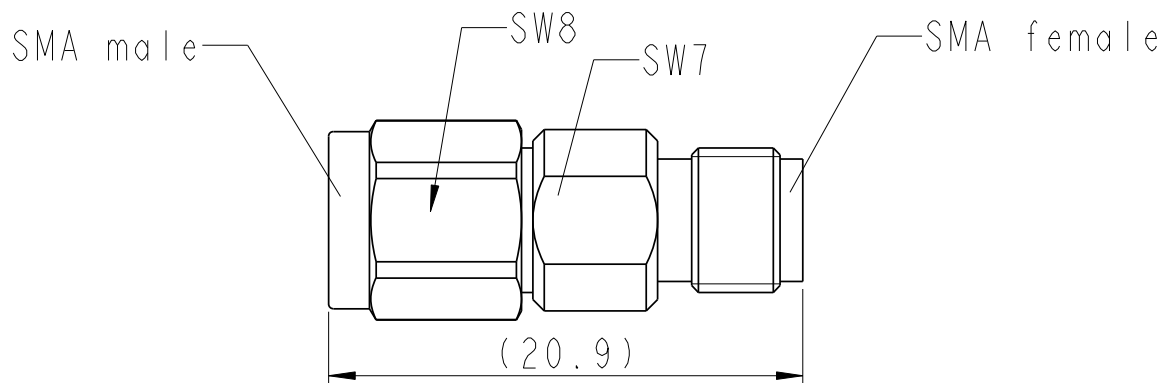
ASMMSMF00

Description:

SMA male to female adapter



1:1

*Electrical Data**Materials**Enviromental Data*

Impedance :50 ohm

Housing: Stainless steel;  
passivated

Temp:-55 - +125

Frequency:DC-18GHz

Center Contact:CuBe;  
Gold PlatedVibration:MIL-STD  
202 214A

VSWR:1.15Max 18GHz

Center Capture: PTFE

Thermal shaoock:MIL-STD  
202 107G

IL:0.06sq+(f\_GHz)

Nut:----

2011/65/EU (RoHS):  
compliant

proprietary information: the information with this data sheet is proprietary and shall not be used for disclosed without prior written permission from CAC Technology .

Date:

2014.12.16

[www.cac-mall.com](http://www.cac-mall.com)

Drawn:

Rudy Sun

Check:

Donglv Wang

Appr:

Rugang Hu

Tel: 0086-551-63718423

Fax: 0086-551-63713075

Email: sales@cactechnology.com

Website: www.cactechnology.com